

X-Band Power GaAs MESFET Investigation



Harry Shaw

Component Technology &
Radiation Effects Branch

5/27/98

NASA Goddard Space Flight Center



Slide 1 of 12

X-Band Power GaAs MESFET Investigation

- ◆ EOS-AM/Landsat-7 Power MESFET (Metal Semiconductor Field Effect Transistor) exhibited unusual degradation in Gate-Drain breakdown voltage during life test.
- ◆ Combination of degradation mechanisms were suspected
- ◆ Extensive RF life tests (~15000 hours) conducted
- ◆ Overstress electrical tests conducted
- ◆ Reliability of devices successfully demonstrated for intended application. Devices did not have to be retrofitted.

NASA Goddard Space Flight Center



Slide 2 of 12

X-Band Power GaAs MESFET Investigation

- ◆ Investigation centered on devices in final 2 stages
- ◆ MGFC36V7785 and MGFC40V7785
- ◆ Application information from Lockheed-Martin indicated device operation was within allowable boundaries for safe, long term operation

NASA Goddard Space Flight Center



Slide 3 of 12

X-Band Power GaAs MESFET Investigation

- ◆ A variety of problems emerged, none of which were noted during Engineering Model phase:
- ◆ 36V and 40V devices displayed a BV_{gdo} (gate-drain breakdown) slump after a high temperature marking operation
- ◆ 36V and 40V devices displayed a BV_{gdo} slump after RF overdrive test
- ◆ 40V devices displayed BV_{gdo} slump during RF life test

NASA Goddard Space Flight Center



Slide 4 of 12

X-Band Power GaAs MESFET Investigation

- ◆ Investigation involved multiple life tests and burn-in's under different conditions
- ◆ Devices displayed shift that was dependent on bias and operating conditions
- ◆ Short term behaviour was attributed to shallow surface state trapping and detrapping. The surface states can be decreased via
 - ▶ thermal acceleration
 - ▶ electric field
 - ▶ electron-hole recombination
- ◆ 36V devices failed initial life test at $V_{ds} = 9.0$ V @ $P_{out} = P_{-5.0\text{db}}$, second sample passed at $V_{ds} = 8.5$ V @ $P_{out} = P_{-2.5\text{db}}$ for 1000 hours

NASA Goddard Space Flight Center



Slide 5 of 12

X-Band Power GaAs MESFET Investigation


- ◆ 4 samples were tested at -15,-17,-19, -21,-23, -25 V reverse breakdown voltage dwelled for one minute at each voltage
- ◆ At -25V the maximum gate leakage recorded was -970mA. B_{VGDO} was -12.15 V (@ $I_G=1\text{mA}$)
- ◆ P_{out} at +22.5dBm (linear) and +32.5dBm (compressed) were recorded after each round
- ◆ All 4 samples met P_{out} requirements > +29.3dBm and +38.3dBm with no degradation

NASA Goddard Space Flight Center




Slide 12 of 12

X-Band Power GaAs MESFET Investigation

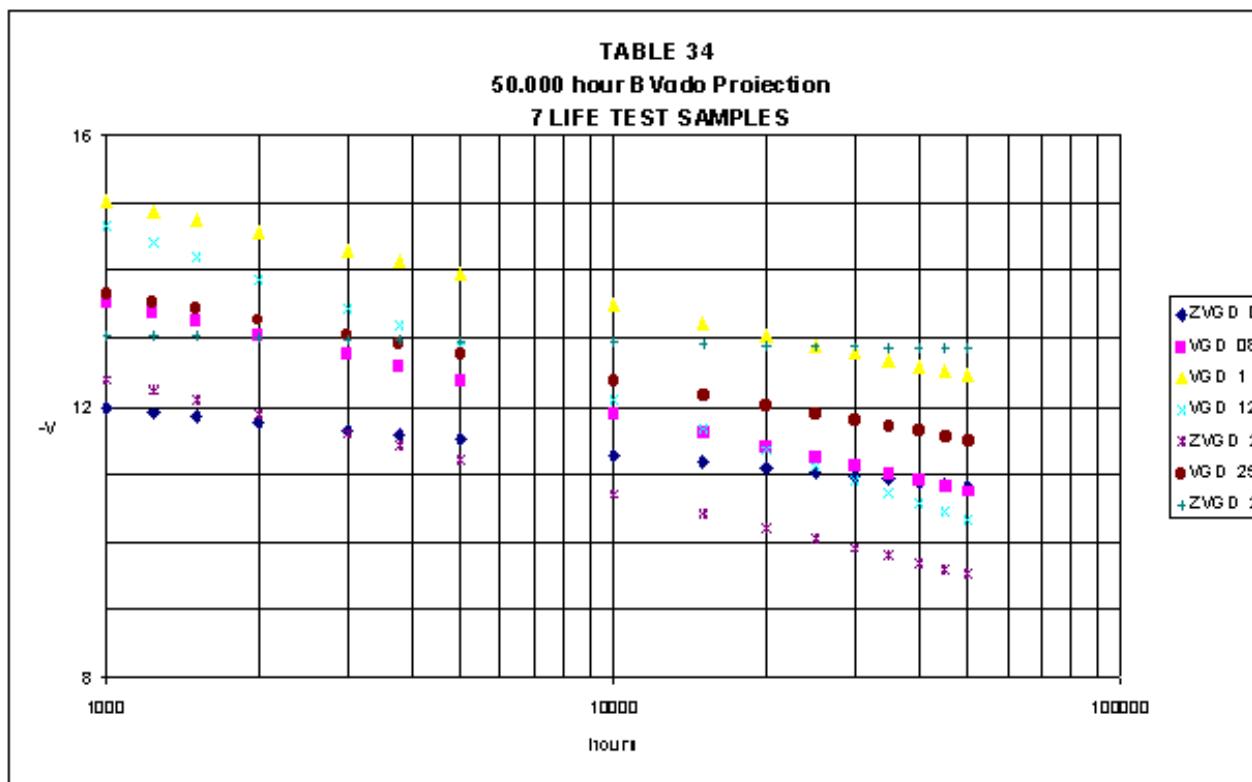


NASA Goddard Space Flight Center






Slide 11 of 12

X-Band Power GaAs MESFET Investigation

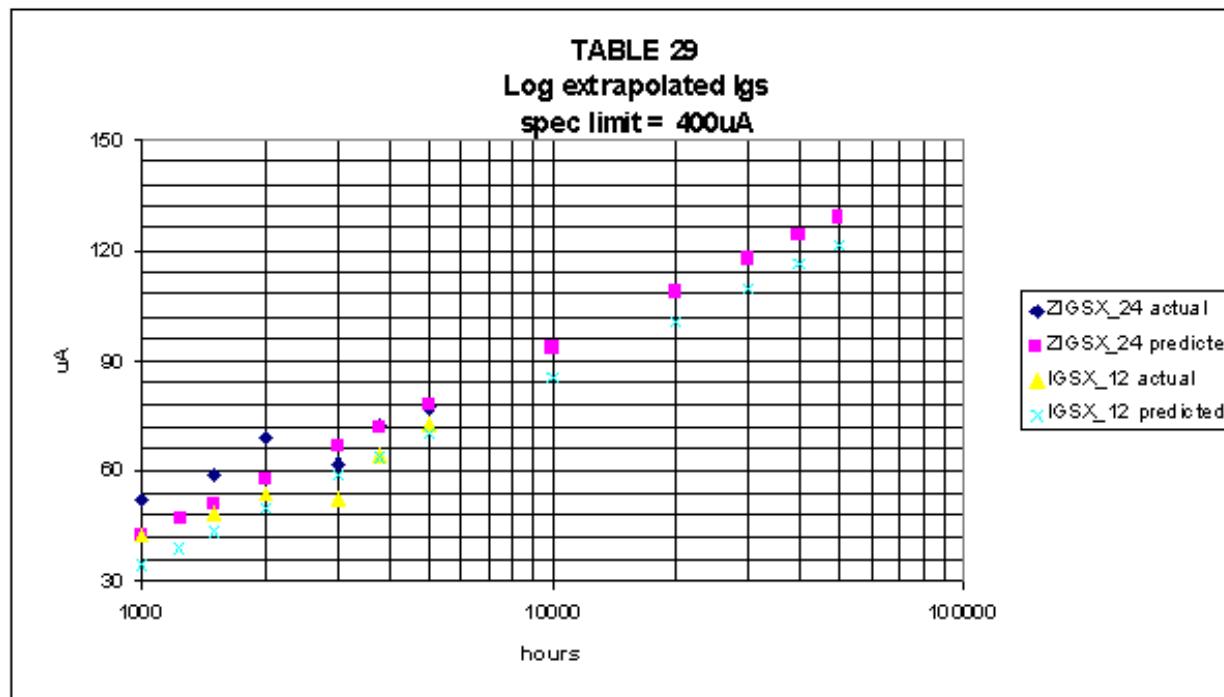

NASA Goddard Space Flight Center





Slide 10 of 12

X-Band Power GaAs MESFET Investigation

- ◆ Investigation by MELCO and LMMS was thorough. The 36V devices were deemed acceptable.
- ◆ The 40V devices were questionable. MELCO believed that BV_{gdo} slump had annealed out after ~1000 hours
 - Would the degradation continue and lead to ultimate device failure due to g-d overstress?
- ◆ NASA analyzed 2000 hour life test data on another sample set of 12 40Vs running at V_{ds}=8.0 V @ P_{out}=P_{-3.0db}
- ◆ Two additional conditions were imposed.

NASA Goddard Space Flight Center



Slide 6 of 12

X-Band Power GaAs MESFET Investigation


- ◆ Extend the 2000 hour test to 5000 hours for 8 samples.
 - ▶ This would bound the question of whether the slump had annealed or if another mechanism would lead to failure
- ◆ Take 4 samples tested to 2000 hours and subject them to high reverse breakdown to determine the robustness of the degraded devices. Testing was conducted in Japan, witnessed by NASA and LMMS

NASA Goddard Space Flight Center




Slide 7 of 12

X-Band Power GaAs MESFET Investigation

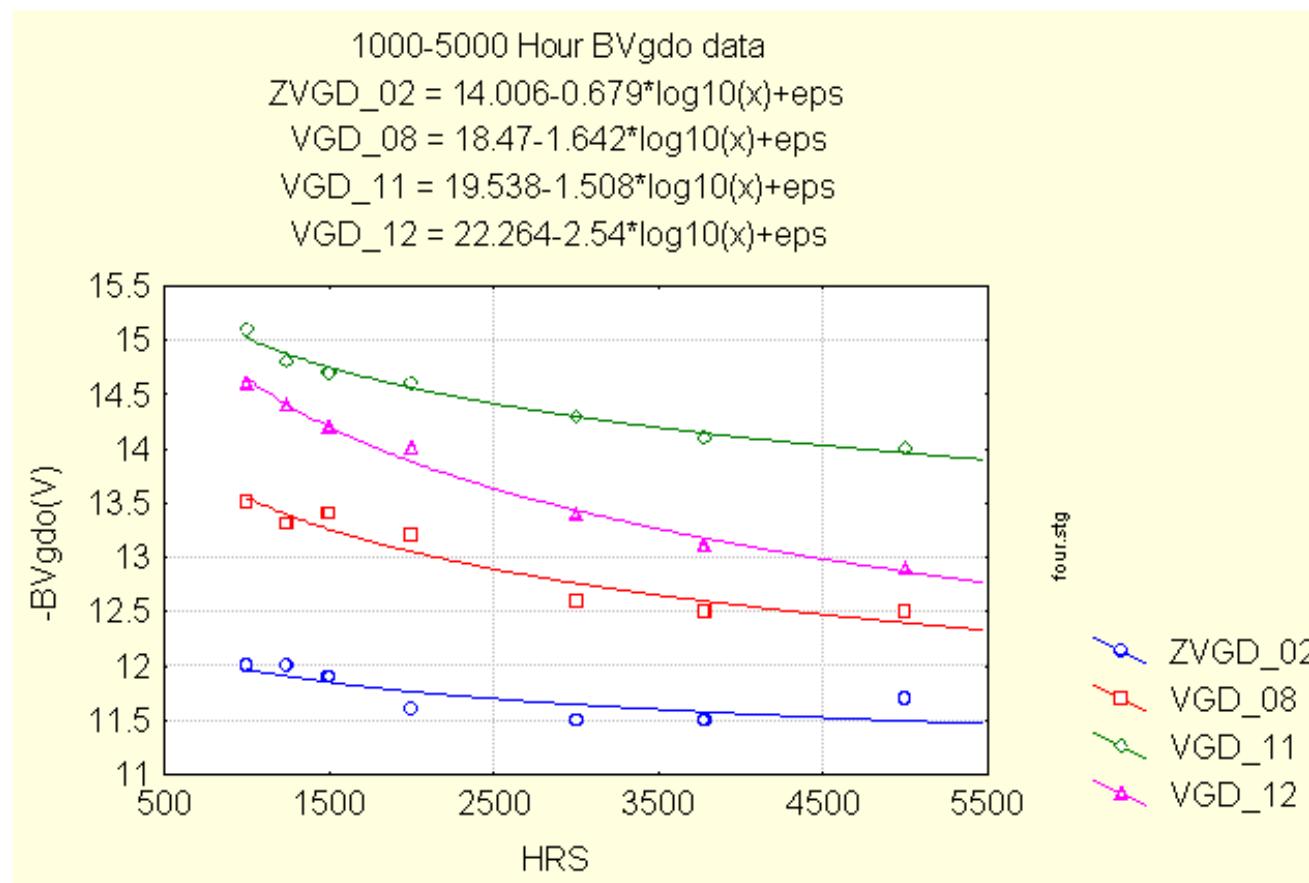


NASA Goddard Space Flight Center






Slide 9 of 12

X-Band Power GaAs MESFET Investigation

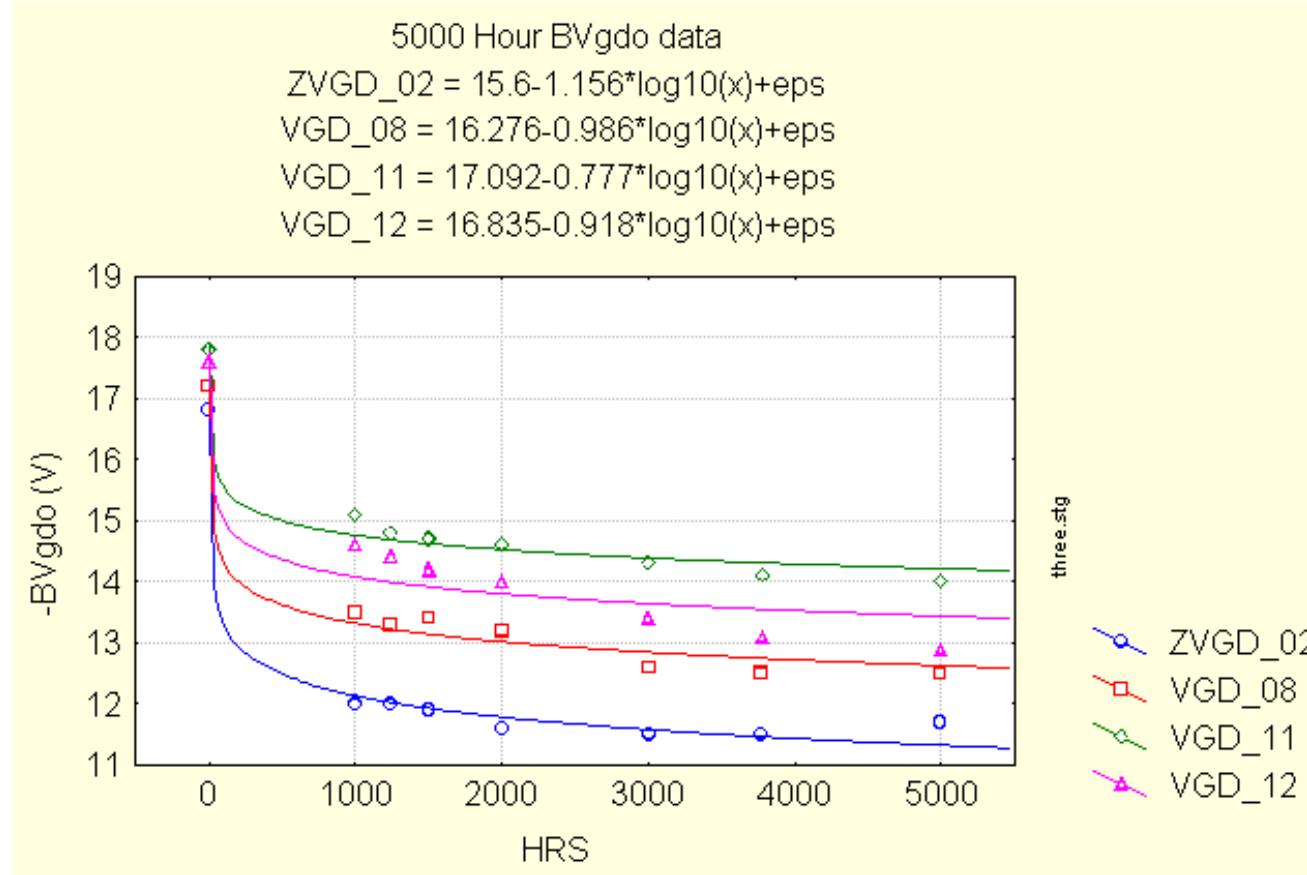

NASA Goddard Space Flight Center





Slide 8 of 12